


# 5 Rung Ladder (AFS 1100-1300) Product Manual

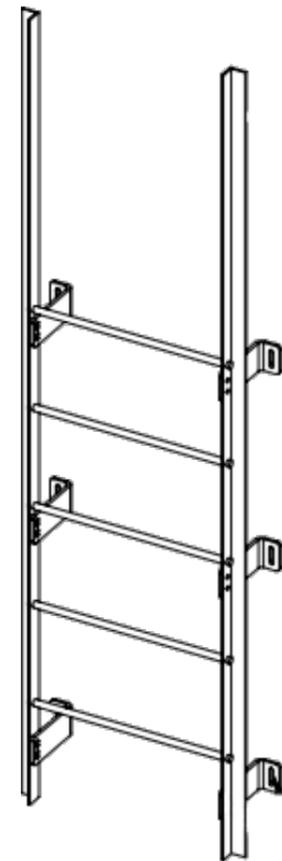


**5 Rung Ladder**

Proprietary rights are included in the information disclosed herein. This information is submitted in confidence and neither the document nor the information disclosed herein shall be reproduced or transferred to other documents for manufacturing or for any other purpose except as specifically authorized in writing by ARE Telecom & Wind.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	initial release	9/9/20	MGC
B			

5 Rung Ladder BOM			
#	Description	Qty.	Weight - kg (lbs)
1	Ladder	1	30.2/ 66.5
2	Ladder Mount Bracket	6	1.9/ 4
3	M12x1.75 x 40mm GR. 8.8 w/ (1x) Nut, (2x) Washer (HDG)	18	

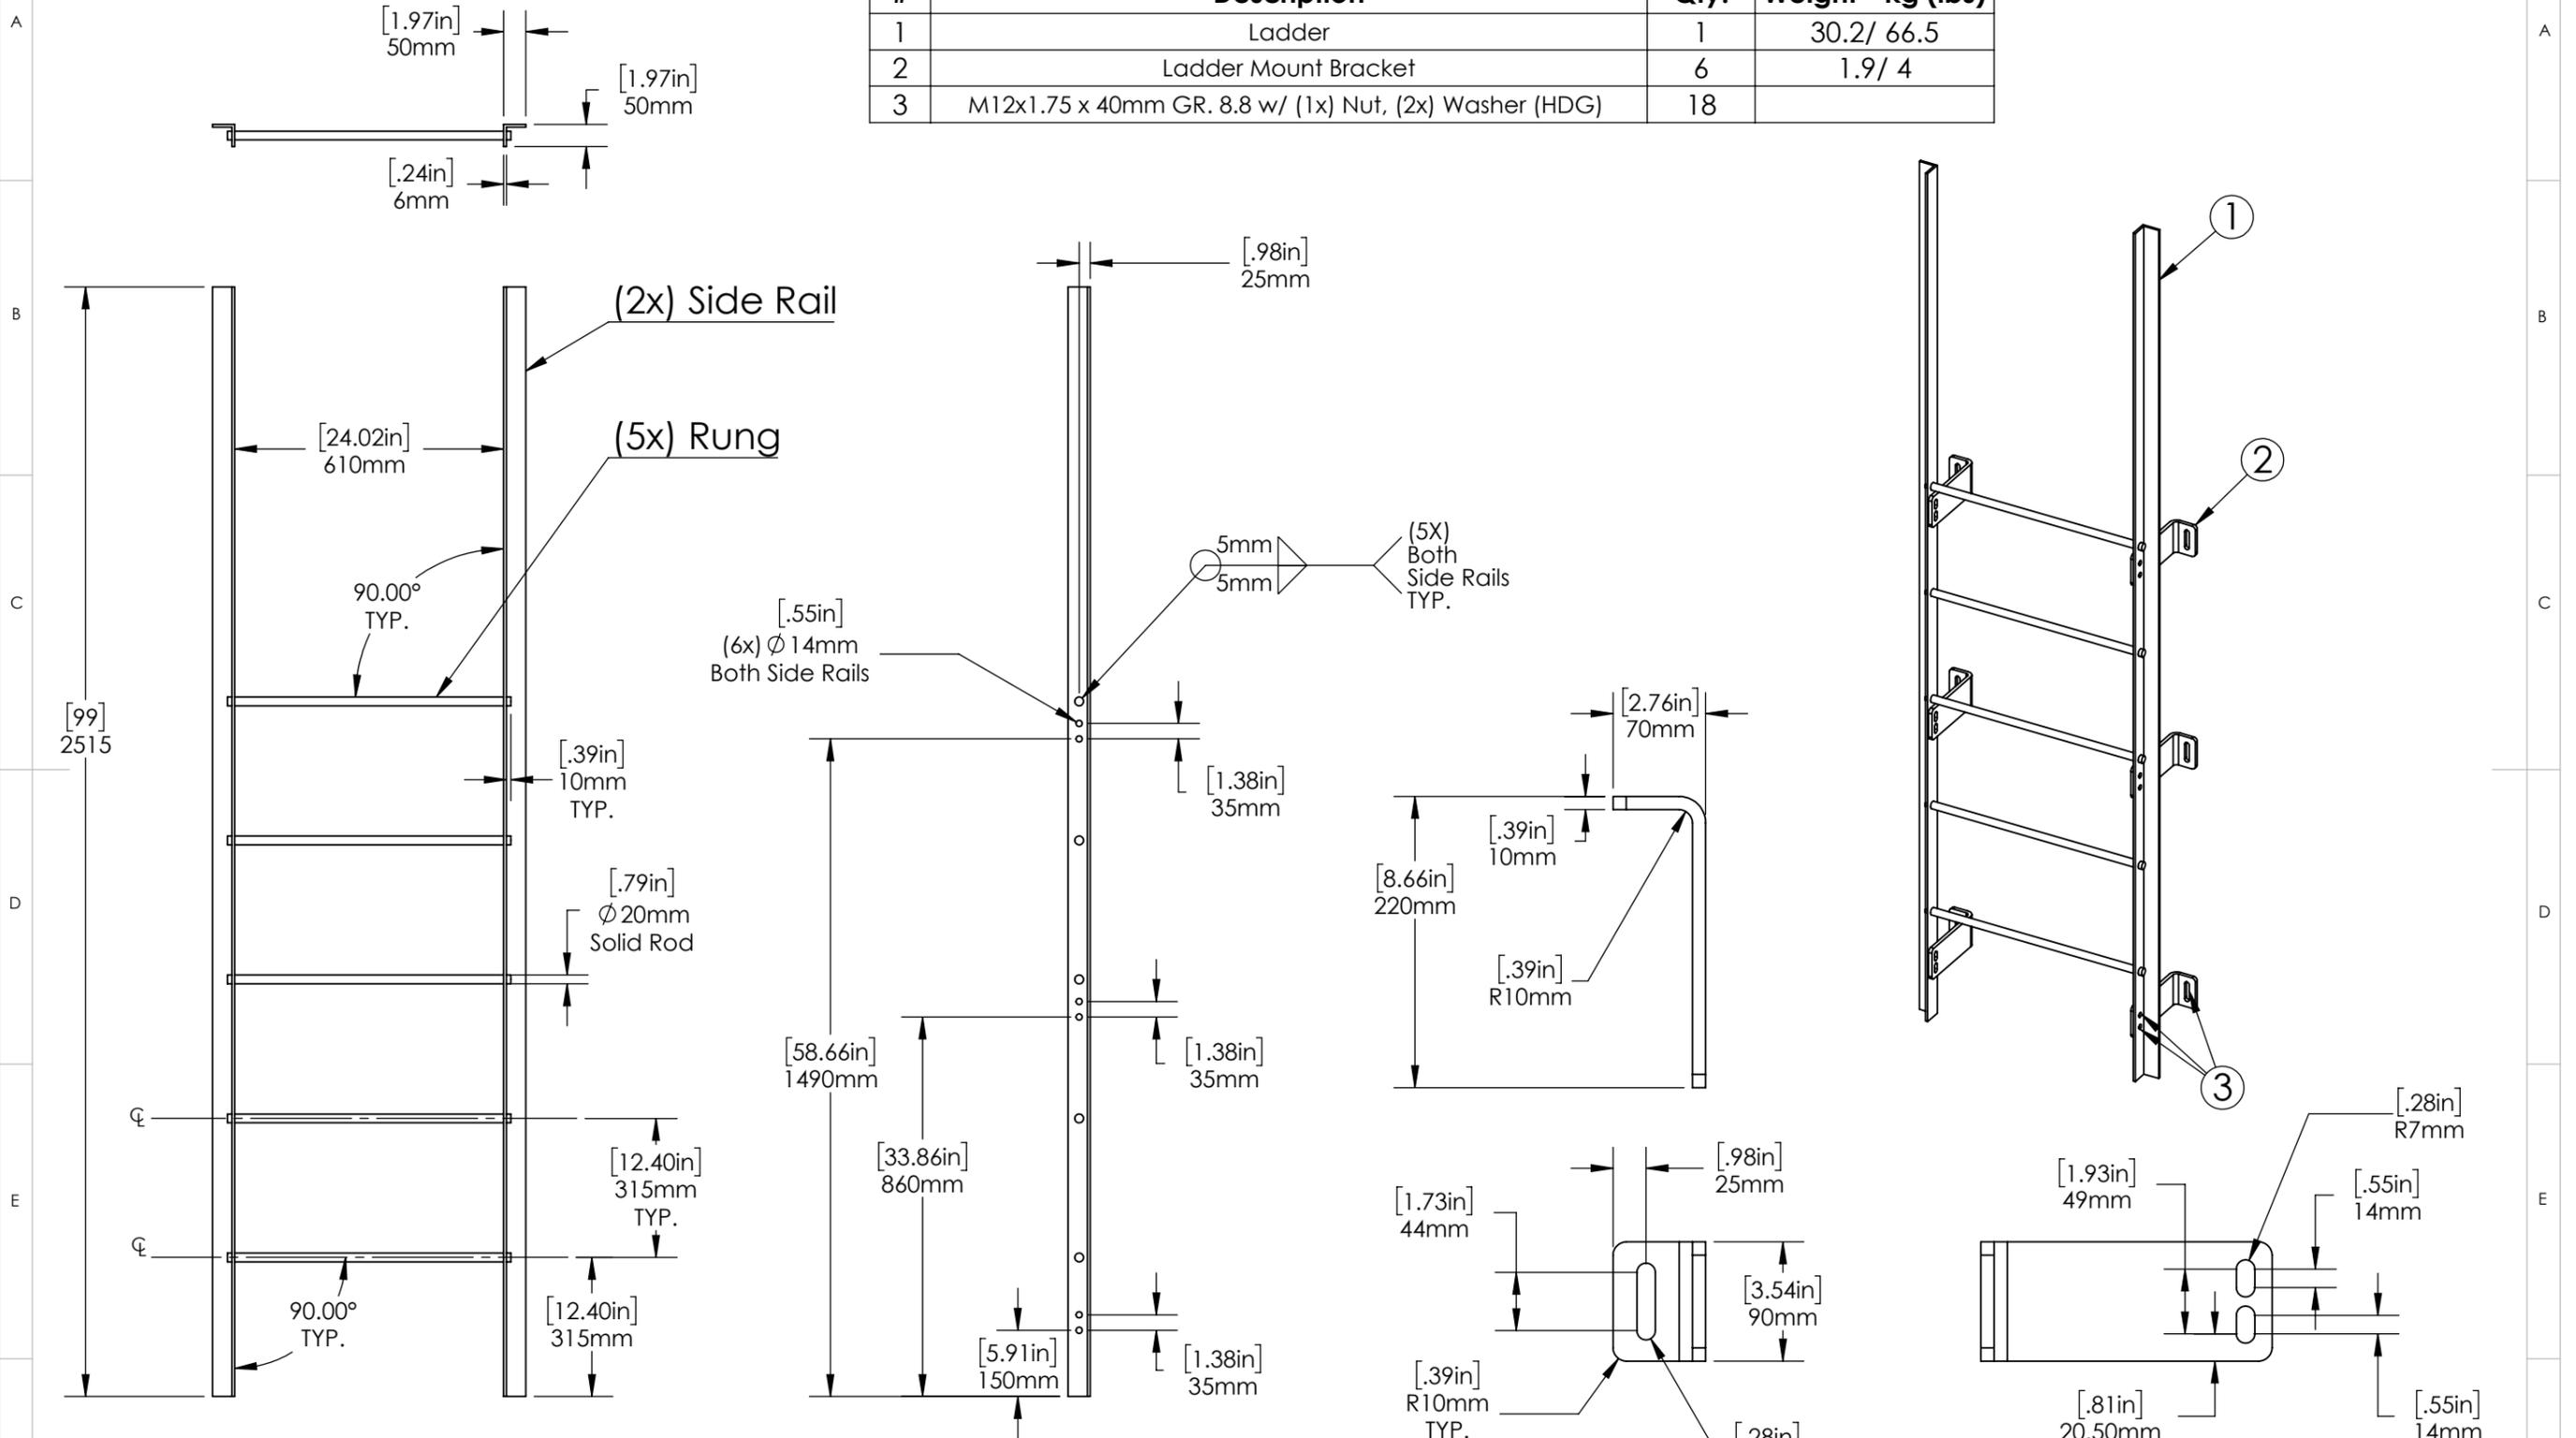

**Notes:**

- All 10mm plate material shall have a minimum yield strength of 345 MPa (50 ksi)
- All 50mm x 50mm x 6mm Right Angle steel shall have a minimum yield strength of 345 MPa (50 ksi)
- All 20mm solid rod material shall have a minimum yield strength of 345 MPa (50 ksi)
- All welding shall conform to the minimum requirements of AWS D1.1
- All welding shall be done by welders qualified under AWS specifications, using E80XX, low hydrogen electrodes
- Adaptor shall be Hot Dip Galvanized in accordance with ASTM A123
- Debur all sharp edges

Steel Weight 42 kg (92.5 lbs)	APPROVALS	DATE	ARE Telecom & Broadband 1041 Grand Avenue, # 213 St. Paul, MN 55105 (651) 330-1263
	DRAWN MGC	9/20/20	
MATERIAL See Notes	CHECKED		<b>5 Rung Ladder</b> <b>AFS1100-1300</b>
	RESP ENG		
FINISH See Notes	MFG ENG		CAD file : Details and dimensions not shown on this drawing can be found in CAD file
DO NOT SCALE DRAWING	QUAL ENG		

scale NA rev. A size NA 1 of 1

**Images**

**Coming soon**